



(6+1)×1 PM Pump & Signal Combiner (MMPC Series)

Features

- High Coupling Efficiency
- High Signal Transfer Efficiency
- Wide Wavelength Range
- Proprietary Pull and Package Technique
- Custom Configurations Available

Applications


- PM Fiber Laser
- PM Fiber Amplifiers

Specifications

Parameter	Unit	Value	
Product Type		PM (6+1)×1	
Pump Wavelength Range	nm	900 - 1000	
Signal Wavelength Range	nm	1060 or 1550	
Fiber Type for Input (Pump Channel)		Nufern 105/125 (0.15 NA or 0.22 NA)	
Fiber Type for Input (Signal Channel)		PM 980, PM 1550, PM-6/125 DC or PM-8/125 DC	
Fiber Type for Output		PM-10/125 DC or PM-20/125 DC	
Signal Channel Insertion Loss	dB	< 0.80	
Min. Pump Efficiency	%	94 (Typ.95)	
Max. Input Pump Power	W	6 × 50	6 × 100
Package Dimensions	mm	P2: 70 (L) × 12 (W) × 8 (H)	P5: 100 (L) × 15 (W) × 10 (H)
Operating Temperature	°C	0 to +65	
Storage Temperature	°C	-40 to +85	

*Mode number summation of all input fibers should be less than that of output fiber.

Package Dimensions

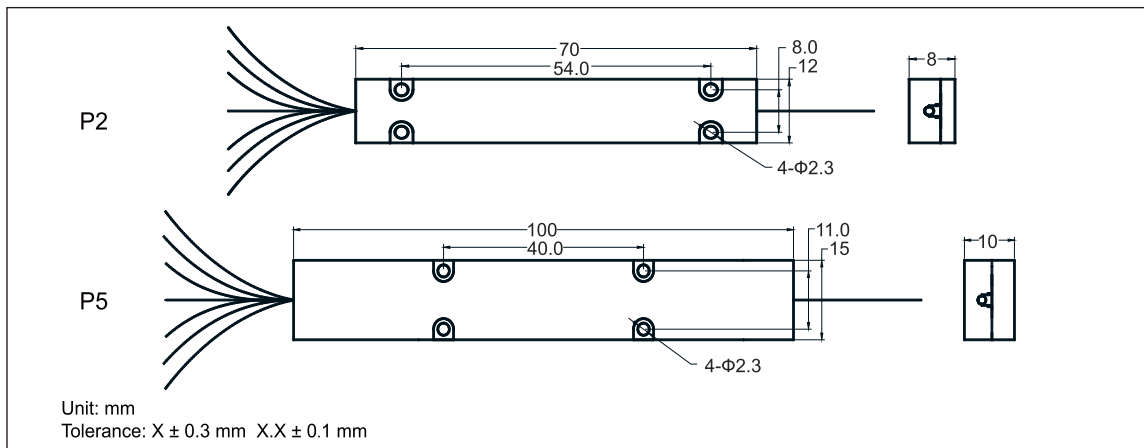

Package Dimensions

MMPC-(6+1)×1-①①-②②②-③③-④④-⑤⑤-⑥⑥-⑦⑦

①①: Signal Wavelength 06 - 1060 nm 55 - 1550 nm SS - Specify	②②②: Pump Wavelength 915 - 915 nm 975 - 975 nm SSS - Specify	③③: Fiber Type for Pump Input 15 - 105/125 (NA 0.15) 22 - 105/125 (NA 0.22)	
④④: Fiber Type for Signal Input 06 - PM-6/125 DC 08 - PM-8/125 DC SS - Specify	⑤⑤: Fiber Type for Output 10 - PM-10/125 DC 20 - PM-20/125 DC SS - Specify	⑥: Fiber Length Q - 0.75 m 1 - 1.0 m S - Specify	⑦: Package Type 2 - P2 5 - P5