

### Key Features

- Turn-key pico-second light source 500nm – 2200nm

### Applications

- Test & Measurement, Sensing, R&D, etc.


### Typical Specifications

Parameter	Min.	Typ.	Max.	Units
Output power	-	1.5	2	W
Wavelength	500	-	2200	nm
Temperature range of operation	15	25	45	°C
Power consumption <sup>(1)</sup>	-	-	70	W
Output Connectors	FC/APC, etc.			

*Specifications are subject to change without prior notice*

Note

- (1) Electrical power consumption depends on the optical output power level

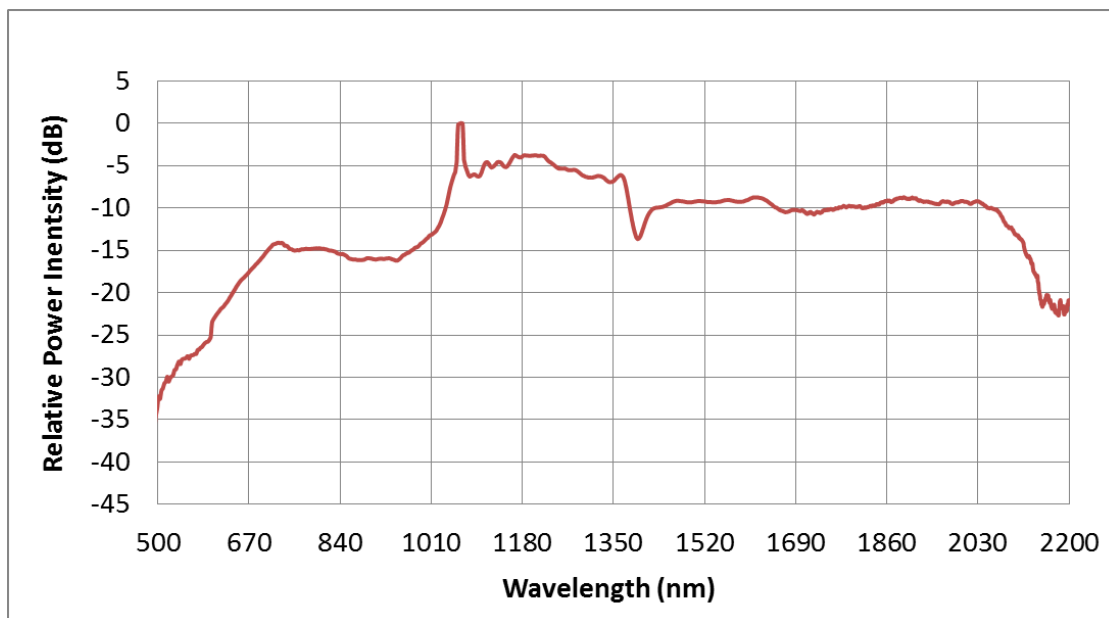

Optical Spectrum of 1.5W supercontinuum source

**Ordering Information:**

Ordering Example

Model Number	SC-2000
Wavelength Range [nm]	500-2200
Package Type	Table-top
Optical Output Power [mW]	2000
Optical Input / Output Termination	FC/APC