



Ultra Low Ratio Tap Coupler (LTC Series)

Rev 11C



The Ultra Low Ratio Tap Coupler splits a very small amount of light from a signal path to a tap port. Low tap ratios such as 0.1%, 0.01% or 0.001% enable the monitoring photodetector to operate without damage or saturation. It is suitable for very high optical power, its main application is in the monitoring of optical sources such as fiber lasers.

Specifications

Parameter	Unit	Value		
Center Wavelength (λ_c)	nm	1064, 1550 or Specify		
Operating Wavelength	nm	$\lambda_c \pm 10$		
Coupling Ratio	%	0.1	0.01	0.001
Tap Insertion Loss	dB	30 ± 3	40 ± 4	50 ± 5
Max. Signal Insertion Loss	dB	0.1		
Thermal Stability	dB/°C	≤ 0.002		
Min. Return Loss	dB	55		
Max. Optical Power (Continuous Wave)	W	5		
Operating Temperature	°C	-40 to +75		
Storage Temperature	°C	-40 to +85		
Fiber Type		Singlemode fiber		

*Test at central wavelength only.

Package Dimensions

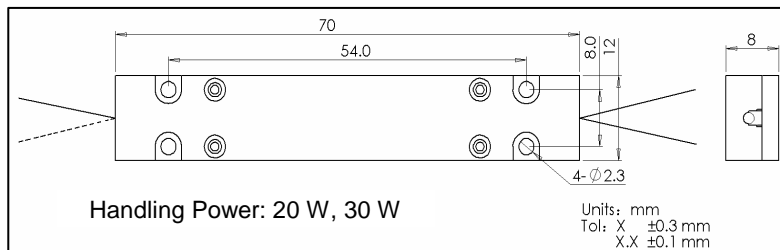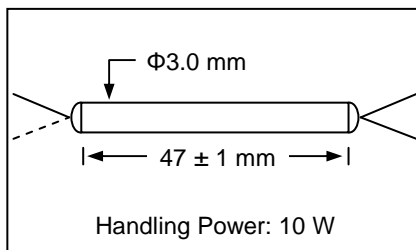

Ordering Information

LTC-①-②②-③-④-⑤-⑥-⑦-⑧

①: Configuration 1 - 1 × 2 2 - 2 × 2	②②: Wavelength 06 - 1064 nm 55 - 1550 nm SS - Specify	③: Coupling Ratio 3 - 0.1% (30dB) 4 - 0.01% (40dB) 5 - 0.001% (50dB) S - Specify	④: Connector Type N - None
⑤: Fiber Jacket B - 250 μ m bare fiber	⑥: Fiber Length 1 - 1.0 m S - Specify	⑦: Fiber Option 4 - Corning HI 1060 6 - Corning SMF-28 S - Specify	⑧: Handling Power 1 - 10 W 2 - 20 W 3 - 30 W