

## Dense Wavelength Division Multiplexers Module (4/8/16 Channels) (DWDMM Series)

Rev 11



The multi-channel Dense Wavelength Division Multiplexer Module is based on thin film DWDM devices by cascading individual channels into sequence. Channel numbers can be as high as 40 (16) for 100 (200) GHz systems in C band or in L band. They are featured with wide passband, low insertion loss, high channel isolation and high environmental stability. They can be used in dense WDM systems to perform multiplexing or demultiplexing function.

### Specifications

Parameter	Unit	4 Ch	8 Ch	16 Ch	4 Ch	8 Ch	16 Ch
Filter Type	nm		100 GHz			200 GHz	
Pass Bandwidth @ 0.5 dB	nm		0.22			0.5	
Max. Insertion Loss	dB	2.5	3.5	4.8	2.2	3.3	4.6
Passband Flatness	dB			1.0			
Channel Uniformity	dB			1.5			
Channel Isolation (Mux)	dB			N/A			
Channel Isolation (Demux)	dB			25			
Max. Polarization Dependent Loss	dB			0.1			
Max. Polarization Mode Dispersion	ps			0.1			
Directivity	dB			55			
Min. Return Loss	dB			45			
Center Wavelength Stability	nm/°C			0.002			
Thermal Stability	dB/°C			0.006			
Max. Optical Power	mW			300			
Tensile Load	N			5			
Fiber Type				SMF-28 fiber			
Operating Temperature	°C			-5 to +70			
Storage Temperature	°C			-40 to +85			
Package Dimensions	mm	100 × 80 × 9.5 (4 Ch), 133 × 95 × 9.5 (8 Ch), 150 × 115 × 14 (16 Ch)					

\*IL is 0.3 dB higher, RL is 5 dB lower for each connector added.

### Package Dimensions

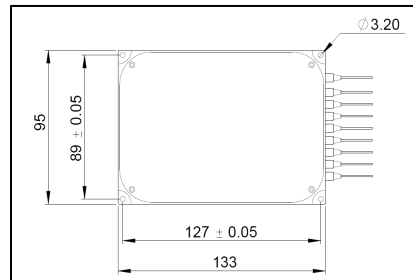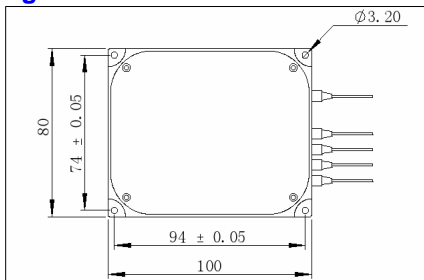

### Ordering Information

DWDMM-①-②②-③-④④-⑤-⑥-⑦

①: Module Type

M - MUX

D - DEMUX

③: Channel Spacing

1 - 100 GHz

2 - 200 GHz

⑤: Connector Type

1 - FC/UPC

2 - FC/APC

3 - SC/UPC

4 - SC/APC

N - None

S - Specify

⑥: Fiber Type

B - 250 μm bare fiber

L - 900 μm loose tube

C - 3 mm cable

S - Specify

②②: Number of Channels

04 - 4 channels

08 - 8 channels

16 - 16 channels

④④: First ITU Grid

⑦: Fiber Length

H - 0.5 m

S - Specify