

Features:

- High-power ultra-wide-spectrum 930-nm SM-fiber coupled SLD modules
- Typical 6 dB spectrum width 115 nm
- Coherence length ~ 6 μm (in air)
- FC/APC-terminated fiber pigtails, other connectors upon request

Applications:

- ultra-high resolution OCT
- optical sensors
- optical measurements
- others

Packages:

- **fiber-coupled** – Butterfly; DIL and other packages are available upon request

Specifications (Nominal Emitter Stabilization Temperature +25 °C)

Parameter	Category	Min	Typ.	Max
Output power, P_{op} , ex SM fiber, mW	HP1	4.0	5.0	-
	HP2	8.0	10.0	-
Forward current at P_{op} , mA	HP1	-	250	350
	HP2	-	250	400
Forward voltage at P_{op} , V	All	-	2.0	2.6
Mean wavelength* at P_{op} , nm	All	920	930	940
Spectrum width at P_{op} , -6 dB level, nm	All	105	115	-
Spectrum width at P_{op} , -10 dB level, nm	All	120	130	-
Spectral flatness at P_{op} , dB	HP1	-	3.0	3.5
	HP2	-	3.5	4.0
Residual spectral modulation depth at P_{op} , %	All	-	2.0	5.0
Secondary coherence subpeaks at P_{op} , dB (10 log)	All	-	-25	-
Slow/fast polarization ratio (PM modules) at P_{op} , dB	All	-	>5	-
Operating temperature [†] at P_{op} , °C	All	-55	-	+70
Storage temperature, °C	All	-55	-	+85
PD monitor photocurrent at P_{op} , μA	All	100	-	-
Cooler current, A	All	-	-	1.2
Cooler voltage, V	All	-	-	3.5

* A center wavelength of 930 nm is not guaranteed. Contact Superlum representative if you require a tighter tolerance of center wavelength.





[†] Butterfly packaged SLDs

The following part numbers should be used when **ordering**:

SLD-471UBB- (a)-(b)-(c)-PD-930-FC/APC,
 where: (a) – power category (HP1 or HP2),
 (b) – package type (DBUT – standard),
 (c) – type of fiber – SM (isotropic) or PM (polarization maintaining),
 PD – monitor photodiode, FC/APC – connector type.

Example: SLD-471UBB-HP1-DBUT-SM-PD-930-FC/APC

TYPICAL PERFORMANCE EXAMPLES

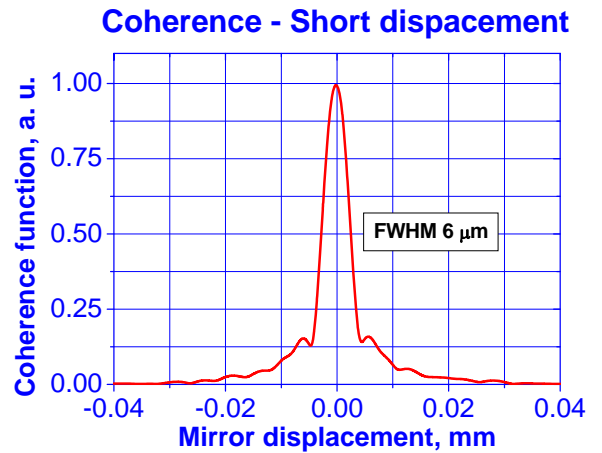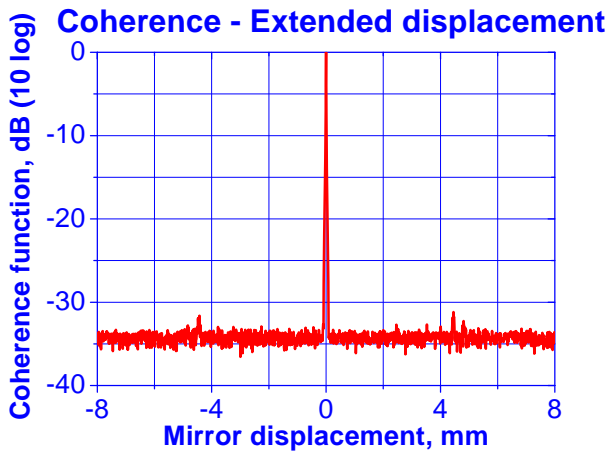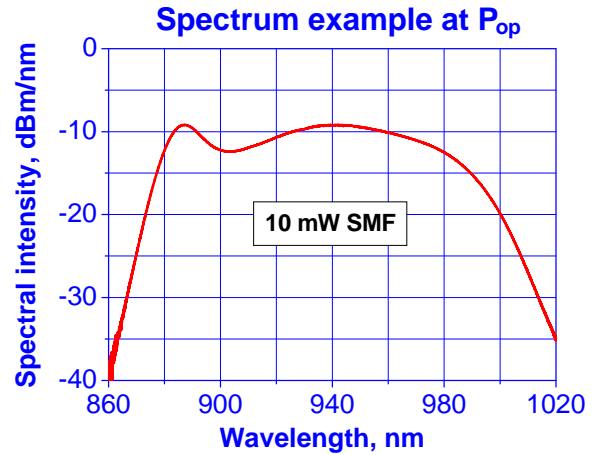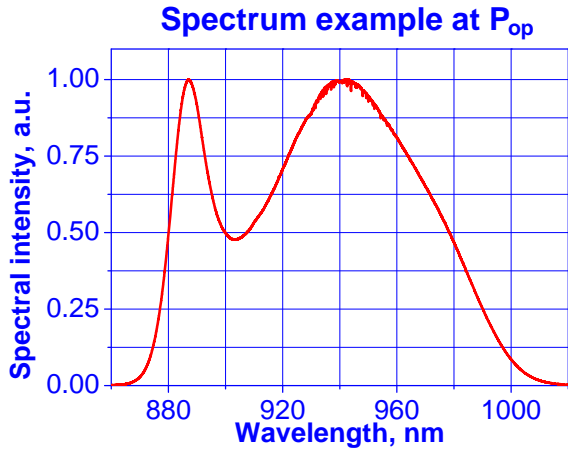

Mirror displacement = Optical path difference / 2

Examples demonstrate typical performance only.
Actual performance may vary from sample to sample and from lot to lot.

All specifications are subject to change without notice.