

Product:

Fiber coupled AOM

Type:

SGTF200-1030-1P

Key Features:


- Fast modulation speed
- Low insertion loss
- Hige extinction ratio
- Small volume
- Good temperature stability and reliability



General Specification:

Parameters	Unit	Min	Typical	Max	Remarks
Wavelength	nm	1000	1030	1060	-
IL	dB	1.5	2.5	3	-
ER	dB	50	-	-	-
Polarization ER	dB	20	22	-	-
Rise time	ns	8	10	12	-
Frenquency shift	MHz	-	200	-	-
3dB Band width	MHz	50	-	-	-
Driving power	W	0.8	1.2	1.5	-
Light tolerance	W	-	-	1	-
Peak light tolerance	kW	-	-	1	-
Fiber length	m	1	1.2	-	-
Fiber optic joint	FC/APC				
Fiber	PM980				
Package Specification	FA				

Outline dimension:

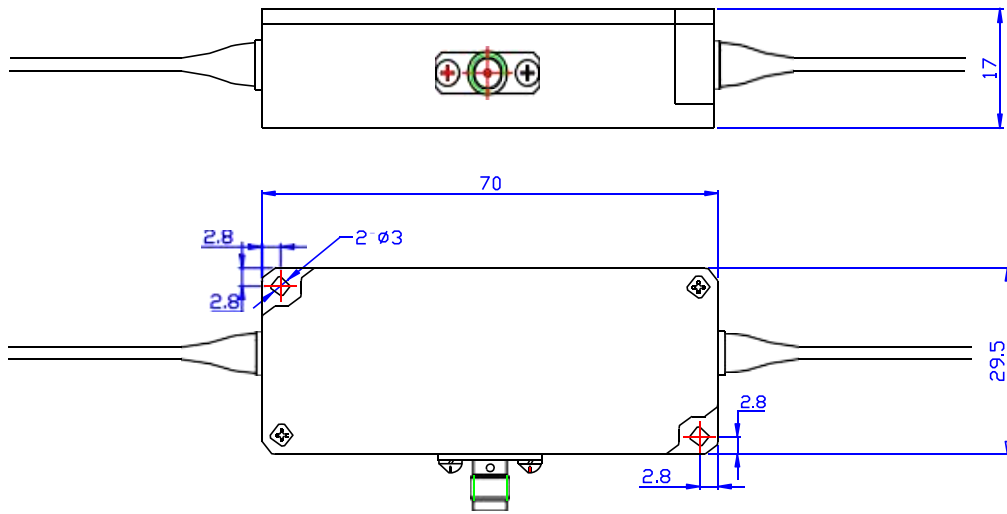

Package FA



JAPAN
DEVICE

日本デバイス株式会社 E-mail sales@j-device.com

www.j-device.com

Tel 03-6262-3424 Fax 03-6800-5883