

Female-Male Fiber Optical Adapter

Application

- CATV
- Telecommunication networks
- LAN

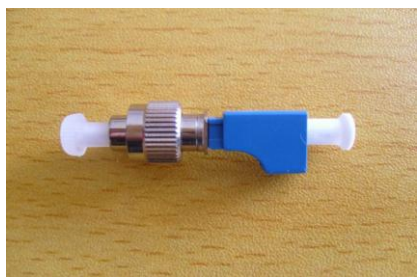


Features

- High stability
- High precision connection
- Good mechanical coupling properties

Specifications

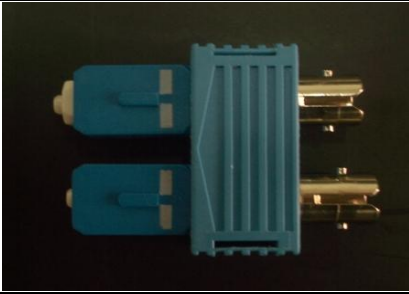
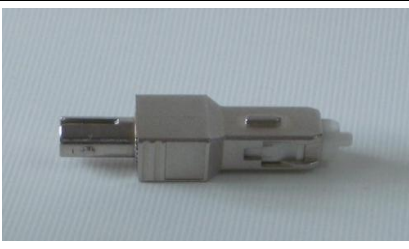



Female-Male Fiber Optical Adapter	
Item	Specification
Insertion Loss (dB)	≤0.3 (Item No. 1, 2, 4, 5, 6, 7, 8, 9, 12, 13, 14, 15, 16, 18) ≤0.5 (Item No. 3, 10, 11, 17)
Return Loss (dB)	>50
Interchange Ability (dB)	≤0.3 (Item No. 1, 2, 4, 5, 6, 7, 8, 9, 12, 13, 14, 15, 16, 18) ≤0.5 (Item No. 3, 10, 11, 17)
Durability (500times) (dB)	≤0.3 (Item No. 1, 2, 4, 5, 6, 7, 8, 9, 12, 13, 14, 15, 16, 18) ≤0.5 (Item No. 3, 10, 11, 17)
Operating Temperature (°C)	-10~+75
Storage Temperature (°C)	-40~+85

Female-Male Fiber Optical Adapter

No.	Type	Description	Picture
1	FC/UPC (Male)-LC/UPC (Female)	FC Metal, LC Plastic	
2	FC/UPC(Female)-SC/UPC(Male)	FC Metal, SC Plastic	
3	FC/UPC(Female)-SC/APC(Male)	FC Metal, SC Plastic	

4	FC/UPC(Female)-ST/UPC(Male)	Full Metal	
5	ST/UPC(Female)-FC/UPC(Male)	Full Metal	
6	FC/UPC(Female)-LC/UPC(Male)	FC Metal, LC Plastic	
7	LC/UPC(Female)-FC/UPC(Male)	FC Metal, LC Plastic	
8	LC/UPC(Male)-FC/UPC(Male)	FC Metal, LC Plastic	

9	SC/UPC(Male)-LC/UPC(Female)	Full Plastic	
10	SC/UPC(Female)-LC/UPC(Male)	SC Metal, LC Plastic	
11	ST/UPC(Female)-LC/UPC(Male)	ST Metal, LC Plastic	
12	SC/UPC(Female)-ST/UPC(Male)	Full Metal	
13	ST/UPC(Female)-SC/UPC(Male), Simplex	ST Metal, LC Plastic	

14	SC/UPC(Male)-ST/UPC(Female),Duplex	ST Metal, SC Plastic	
15	ST/UPC(Female)-SC/UPC(Male)	Full Metal	
16	ST/UPC(Male)-ST/UPC(Female)	Full Metal	
17	FC/UPC(Male)-MU/UPC(Female)	Full Metal	
18	SC/UPC(Female)-FC/UPC(Male)	Full Metal	
19	SC/UPC(Male) -SC/UPC (Female)	Full Metal	



Note: For the necessity of improvement, the material contained in this document is subject to change without notice.

Version20160421



日本デバイス株式会社

E-mail sales@j-device.com

www.j-device.com

Tel 03-6262-3424 Fax 03-6800-5883